




# MINIATURE 5V OUTPUT HIGH TEMPERATURE PRESSURE TRANSDUCER WITH INTEGRATED TEMPERATURE SENSOR

## ETL/T-HT-375 (M) SERIES

- Combined Pressure and Temperature Measurement Capability
- 5 VDC Output
- 365°F Temperature Capability
- Hybrid Microelectronic Regulator-Amplifier
- Flush Diaphragm
- Robust Construction
- Patented Leadless Technology VIS®
- All Welded Construction
- Designed For Automotive Applications
- Secondary Containment On Absolute And Sealed Gage Units
- 3/8-24 UNJF or M10 X 1 Thread



The ETL/T-HT-375 is a miniature threaded pressure transducer/platinum RTD combination. The pressure transducer utilizes a patented silicon on silicon design. The platinum RTD protrudes beside the diaphragm to sense media temperature. The pressure and temperature devices are designed to operate independently. All wetted parts of the transducer are compatible with most industrial and automotive fluids.

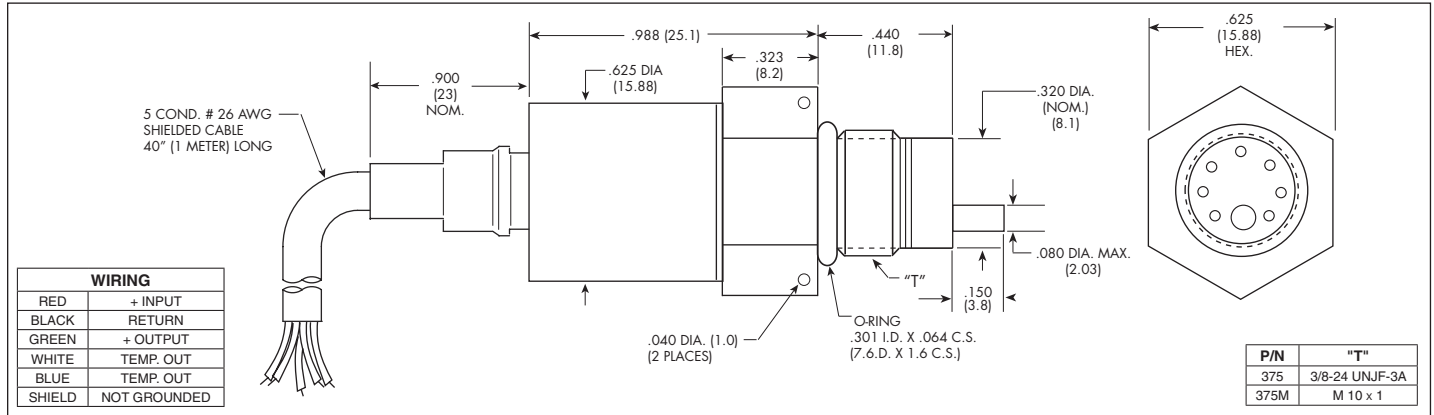

INPUT	Pressure Range	0.7 10	1.0 15	1.7 25	3.5 50	7 100	17 250	35 500	70 1000	170 2500	250 BAR 3600 PSI	
	Operational Mode	Absolute		Absolute, Sealed Gage								
	Over Pressure	2 Times Rated Pressure to 1000 PSI (70 BAR) 1.5 Times Rated Pressure Above 1000 PSI to a Max. of 6000 PSI (420 BAR)										
	Burst Pressure	3 Times Rated Pressure										
	Pressure Media	Most Conductive Liquids and Gases - Please Consult Factory (All Media May Not Be Suitable With O-Ring Supplied)										
	Maximum Electrical Current	25 mA										
	Rated Electrical Excitation	8 - 16 VDC					15 - 32 VDC					
	RTD Excitation	1mA (2mA Max.)										
OUTPUT	Full Scale Reading	5 VDC ± 75mV (3 Wire System Single Ended Output)										
	Residual Unbalance	0.5V ± 75mV										
	Output Impedance	200 Ohms (Typ.)										
	RTD	1000 Ohms Platinum, DIN EN 60751 Tables, Class A (65% Response Time 3 Seconds Max.) in Liquid										
	Bandwidth (-3dB)	DC to 5 kHz										
	Combined Non-Linearity, Hysteresis and Repeatability	± 0.1% BFSL (Typ.), ± 0.5% BFSL (Max.)										
ENVIRONMENTAL	Resolution	Infinitesimal										
	Acceleration Sensitivity % FS/g Perpendicular	1.0x10 <sup>-3</sup>	6.5x10 <sup>-4</sup>	5.0x10 <sup>-4</sup>	3.0x10 <sup>-4</sup>	1.5x10 <sup>-4</sup>	1.0x10 <sup>-4</sup>	6.0x10 <sup>-5</sup>	4.0x10 <sup>-5</sup>	2.5x10 <sup>-5</sup>	1.7x10 <sup>-5</sup>	
	Insulation Resistance	100 Megohm Min. @ 50 VDC										
	Operating Temperature Range	-4°F to +365°F (-20°C to +185°C)										
	Compensated Temperature Range	+32°F to +350°F (0°C to +175°C)										
	Thermal Zero Shift	± 1% FS/100°F (Typ.)										
	Thermal Sensitivity Shift	± 1% /100°F (Typ.)										
	Linear Vibration	10-2,000 Hz Sine, 100g. (Max.)										
	Mechanical Shock	20g half Sine Wave 11 msec. Duration										
	PHYSICAL	Electrical Connection	5 Conductor 26 AWG Shielded Cable 40" (1 Meter) Long									
Weight		20 Grams Excluding Cable										
Pressure Sensing Principle		Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon Patented Leadless Technology										
Mounting Torque	50 Inch-Pounds (Max.) 6Nm											

