


# VW Sensor Cable 5mm

Geosense Part No  
Type

Q10-021  
900/M/04/022/PUR/OG/5.0

## Specifications

Conductor	
Material	Stranded Tinned Copper
Conductor No	4
Construction	Multicore
Stranding	7 X 0.20mm
Section	24 AWG (0.22mm <sup>2</sup> )
Insulation	
Diameter	1.0mm
Material	Polyethylene
Colour	Red,Green,Black,White
Shielding	
Type 1	Al-Foil Spiral Shield
Material	Aluminium
Type 2	Mylar Spiral Shield
Jacket	
Diameter	5.0mm
Material	Thermoplastic Polyurethane (TPU)
Colour	Orange
Technical	
Weight	30 kg/km
Minimum Bend Radius	15 x diameter
Rated Temperature	80°C
Conductor Resistance	94 Ω/km
Tensile Strength	25.0 N/mm <sup>2</sup> (BS EN 50363-10.2)
Elongation to Break	300% (BS EN 50363-10.2)
Additional Information	
Compliance	2011/65/EU (RoHS 2 )
Drain Wire	7 x 0.20mm STC

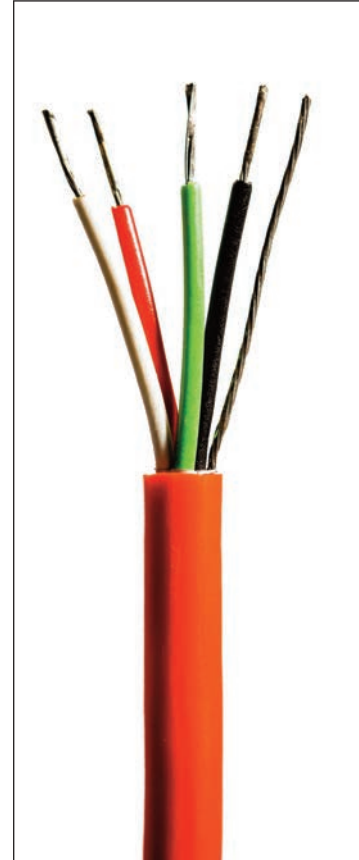

## Usage guide

- ~ VW Extensometer (Single)
- ~ VW Crack Meter
- ~ VW Displacement Transducer
- ~ VW Joint Meter
- ~ VW Embedment Strain Gauge
- ~ VW Surface-Mount Strain Gauge
- ~ VW Spot-Mount Strain Gauge
- ~ VW Sister Bar/Rebar
- ~ Thermistors
- ~ Resistance Temp Detector PT100



[WWW.HOSKIN.CA](http://WWW.HOSKIN.CA)

- ENVIRONMENTAL • INSTRUMENTATION • MATERIALS TESTING
- INTEGRATED SYSTEMS • RENTALS • SERVICE

Vancouver | Oakville | Montréal | Edmonton