

AD-4406A

Static Weighing Indicator

The AD-4406 is small, light (650g) and easy to use. The AD-4406 is equipped with a 25mm LCD and battery operation is possible.

Display

Large Liquid Crystal Display (LCD) with 25mm high characters

Weighing Functions

- Multiple weighing intervals (dual range)
- Check-weighing function (5 levels)
- Displays or outputs cumulative weight values, the number of accumulations, etc.
- Memory function
- Stores four sets of setpoints to memory.

External I/O

Optional Items
RS-232C, RS-422/485, Relay Output, Control Input, Analog Output (4-20mA), Current Loop Output, Stand


Digital Calibration Function

Power Supply


AC adapter or alkaline C type battery 6PCS
Battery life 180 hours (Load Cell 350 $\Omega \times 1$)
Battery life 70 hours (Load Cell 350 $\Omega \times 4$)




With optional stand

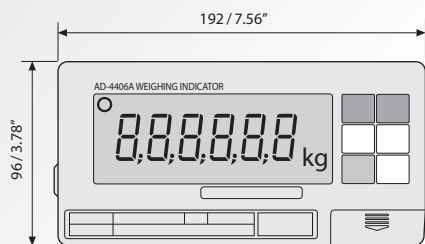


Front View



Side View

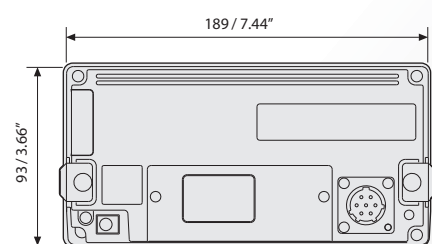


Back View

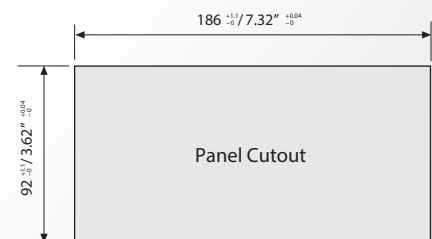


Panel Cutout


(With optional stand)

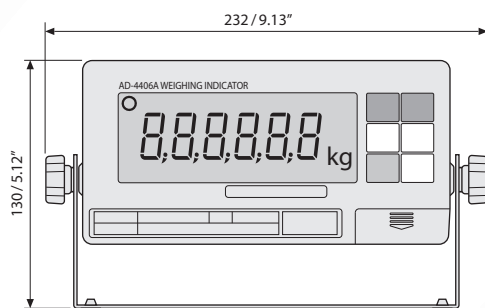

Front View



Side View

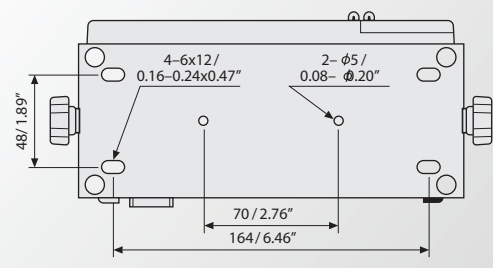

Unit: mm/inches



WWW.HOSKIN.CA

- INTEGRATED SYSTEMS • RENTALS • SERVICE
- ENVIRONMENTAL • INSTRUMENTATION • MATERIALS TESTING

Vancouver | Burlington | Montréal | Edmonton