





Consolidation Testing System (Rowe & Barden Type) (GDSCTS)

The GDS Consolidation Testing System (GDSCTS) is a state-of-the-art, fully-automated consolidation testing system designed for soil. GDSCTS can run classic tests such as step loading to more advanced tests such as automated testing rate by controlled hydraulic gradient or cyclic loading, all under PC control. In fact, using the flexibility of GDSLAB software, almost any user-defined test may be performed. The GDSCTS has the option of vertical drainage or radial & vertical drainage.

Key Features:	Benefits to the User:
Rowe and Barden type cell:	Direct stress control on specimen via either a flexible porous disc (constant stress) or rigid porous disk (constant strain).
Flexibility in the capacity of the system:	Specimen size, load, pressures can be chosen to ensure the system is created specifically to suit the testing required and the budget.
Advanced testing (ADVCTS):	Remains the leading Rowe & Barden type consolidation system for research testing throughout the world. All elements of the ADVCTS system are biased towards achieving the greatest resolution and accuracy, for the highest quality test achievable in a research environment.
Standard testing (STDCTS):	Provides a low cost alternative with all the features of the ADVCTS system with slightly reduced accuracies by using GDS standard pressure/volume controllers rather than advanced pressure/volume controllers.

Tests that can be Performed:

K0 (K-Zero), Multi-stage Testing, Oedometer/Consolidation, Constant Head Permeability, Pore Water Volume Change, Quasi-Static (low speed/creep) Tests, RAMP and CYCLE pressure or volume change (Saturation Ramp), Axial Compression, Constant rate of Loading (CRL) Consolidation, Constant rate of strain (CRS) Consolidation, Load Control (Static), Maximum Shear modulus, Static Displacement, Static Load, Stepped Loading.


Upgrade Options:

- Radial drainage.
- UNSAT (High air entry stone bonded into a specially modified base).
- Bender Elements Testing.
- The GDS consolidation system can become a GDS stress path triaxial testing system by changing the test cell, adding a further 200cc pressure/volume controller and triaxial software modules.

Technical Specification:

Pressure Range:	3.5MPa	
Accuracy of pressure measurement:	<0.1% full range (ADVTCTS) or <0.15% full range (STDCTS)	
Resolution of pressure measurement:	0.1kPa (ADVCTS) or 1kPa (STDCTS)	
Accuracy of volume measurement:	<0.1% measured value (ADVCTS) or <0.25% measured value (STDCTS)	
Resolution of volume measurement:	0.5mm ³ (ADVCTS) or 1mm ³ (STDCTS)	
Sample size:	50, 61.8, 63.5, 70, 76.2 or 100mm	
Transducer resolution:	16bit	



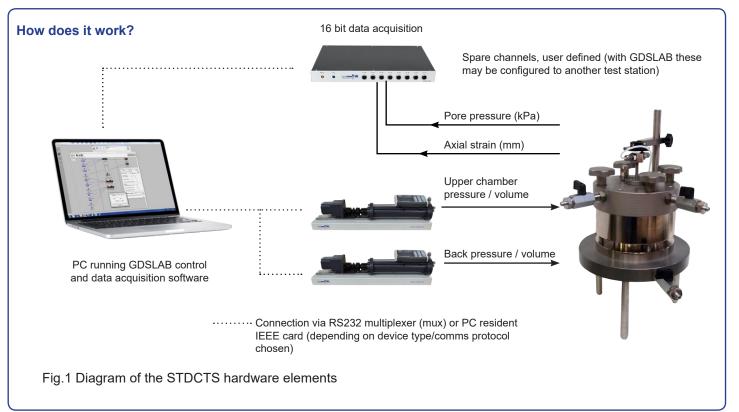

The GDS Rowe and Barden Consoldiation Cell

The GDS Rowe & Barden consolidation cell can be used with either a rigid porous disk for constant strain (see Fig 2a) or flexible porous disk for constant stress (see Fig. 2b).

The cell is available in a range of sizes for test specimens of 50, 63.5, 70, 76.2 and 100mm diameter. Back pressure is applied to the top drain of the cell so that field hydraulic gradients can be modeled. The bottom drain is provided with a tapping for a pressure transducer. The cell incorporates the novel Bishop and Skinner floating ring which allows the top bag to move with the specimen vertically. The main advantage of this method is that it allows measurement of the upper chamber volume change to be used as a calculation of axial strain.






Fig. 3 GDS Rowe and Barden consolidation cell external axial displacement measurement point



Fig. 4 GDS Rowe and Barden Consolidation Cell

www.hoskin.ca | sales@hoskin.ca Vancouver | Oakville | Montréal



GDSLAB Control Software

The GDSLAB control and acquisition software is a highly developed, yet extremely flexible software platform. Starting with the Kernel module and the ability to perform data acquisition only, additional modules may be chosen for your testing requirements. Some currently available modules are as follows:

Consolidation:

- SATCON (saturation and consolidation)
- Advanced Rowe/Rowe and Barden consolidation

Triaxial:

- SATCON (saturation and consolidation)
- Standard triaxial
- Stress path testing (p, q and s, t)
- Advanced loading tests (cyclic, user defined)
- · Unsaturated testing
- K0 consolidation
- · Permeability




Fig. 5 Object display showing a standard STDTAS arrangement (Load Frame based stress path system)

GDSLAB has the ability to be configured to your hardware of choice, no matter how unique the arrangement. A text file (*.ini) or initialisation file is created that describes the hardware connectivity to the PC. The hardware layout is available in graphical format via the GDSLAB 'object display'. This makes setting up the devices and checking the connectivity extremely simple (see Fig. 5).

Pressure/volume Controllers

The cell pressure and back pressure controllers may be mixed and matched. There is the Standard Pressure/Volume Controller with pressure ranges from 1 to 4MPa, serial PC connectivity and 200 cc volumetric capacity. Or there is the Advanced Pressure/Volume Controller with pressure ranges of 2MPa, 3MPa, 4MPa, 8MPa, 16MPa, 32MPa, 64MPa and 100MPa with serial or IEEE PC connectivity and 200cc volumetric capacity. (Also, the ADVDPC 2MPa controller can be bought as 1000cc volumetric capacity item).

The back pressure controller, which applies back pressure, also measures volume change of the test specimen.

Upgrade to Unsaturated Testing

Any GDSCTS system may be upgraded to perform unsaturated triaxial testing with the addition of the following items:

- Replacement base plate with high air entry porous stone
- 1000cc Advanced Pressure/Volume Controller, ADVDPC, (for application of pore air pressure and measurement of air volume change) as in Fig. 7.



Fig. 7 1000cc Advanced Pressure/Volume Controller (ADVDPC)

GDS have supplied equipment to over 84% of the world's top 50 Universities:

GDS have supplied equipment to over 84% of the world's top 50 Universities who specialise in Civil & Structural Engineering, according to the "QS World University Ranking 2019" report.

GDS also work with many commercial laboratories including BGC Canada, Fugro, GEO, Geolabs, Geoteko, Golder Associates, Inpijn Blokpoel, Klonn Crippen, MEG Consulting, Multiconsult, Statens Vegvesen, NGI, Ramboll, Russell Geotechnical Innovations Ltd, SA Geolabs, SGS, Wiertsema and Partners to name a few.

Would you recommend GDS equipment to your colleague, friend or associate?

100% of our customers answered "YES"

Results from our post-delivery survey asked customers for feedback on their delivery, installation (if applicable), supporting documentation, apparatus and overall satisfaction with GDS. The survey ran for two years.

Made in the UK:

All GDS products are designed, manufactured and assembled in the UK at our offices in Hook. All products are quality assured before they are dispatched.

GDS are an ISO9001:2015 accredited company. The scope of this certificate applies to the approved quality administration systems relating to the "Manufacture of Laboratory and Field Testing Equipment".

Extended Warranties:

All GDS apparatus are covered by a 12 month manufacturers warranty. In addition to the standard warranty, GDS offer comprehensive extended warranties for 12, 24 and 36 months, for peace of mind against any repairs in the future. The extended warranties can be purchased at any time during the first 12 months of ownership.

GDS Training & Installation:

All installations & training are carried out by qualified engineers. A GDS engineer is assigned to each order throughout the sales process. They will quality assure the apparatus prior to shipping, if installation has been purchased, install the apparatus on the customers site & provide the training.

Technical Support:

GDS understand the need for ongoing after sales support, so much so that they have their own dedicated customer support centre. Alongside their support centre GDS use a variety of additional support methods including remote PC support, product helpsheets, video tutorials, email and telephone support.





	Non NY (a Days: G (A basis - A age - C) (CD) (adarses	a Managardan Buay Serie D	Corpore due: D Constant Q One		
ayako					
Rame E Salard a	hand B Developh		0,00		
	A firm by part and by the				
and the local data	Knowledgebase : Product Helpsheets				
	Static Triadal Insting	Dynamic Testing Systems (Advanced & High Pressure Controller (1		
Techigites Techigites	C 400000, invastgating anno conditions or system dated of C 400000, Catocherey matting by the blood off	Clother stee rollocit to take realises cannot Clother Wellow Then Edward from	 Although String & Marging and Stringships Although Conference designing and confidence and moments and up 		
and reprint 112	Standard Controller	Sufficiency	Hardware Transforms Calls Thursd		
	C ADS 201, 10(1) & 5, Sectors Comparison Adversaria Comparison Country	\bigcirc 0014.04 . (put localistics puts and shock for \bigcirc 0.044 where a 0010100 \rightarrow puts for field (a two	Initial Constants - Sellar John più appolitatione Transe Mettra Antenne - Long the entenies tra- loge		
	Relighter (1), Return of grands to EDB. Manual (1), Statistical of the Statistical International Internat				
	Bulgabeet the Hardware Single Dear & Pere Pressure				



EXCELLENT VERY GOOD

> GOOD AVERAGE

> > POOR



