


DATUM ELECTRONICS

UNIVERSAL TRANSDUCER INTERFACE PRODUCT OVERVIEW

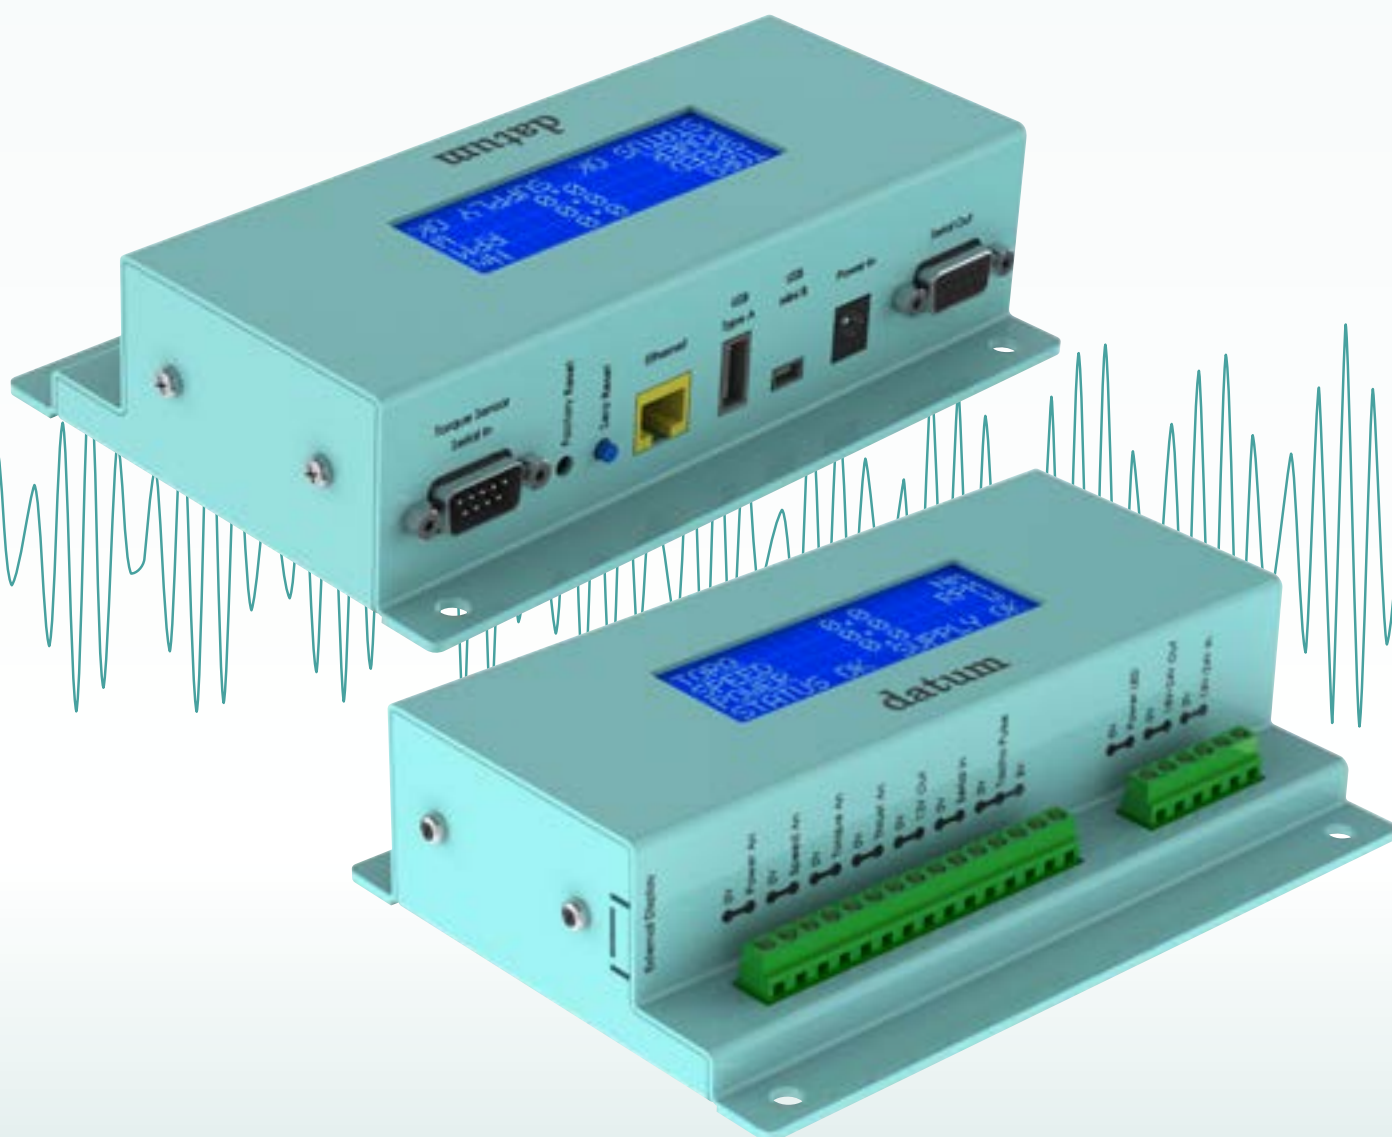

THE DATUM UNIVERSAL TRANSDUCER INTERFACE

The Datum Universal Transducer Interface has been designed to accept signal from all of the Datum Electronics range of Rotary and Static Torque Sensors.

The sensor ranges supported include:

M425 Rotary Torque Transducers


RS/FF425 Rotary Torque Transducers

Commercial Marine and Heavy Industrial Torsionmeter Systems


NTM Naval Marine Torsionmeter Systems

RS/FF410 Static Torque Transducers

The interface will accept the serial data from any of the above and most of the earlier Datum products. It will provide a display of the data and a wide range of analogue and serial data outputs.

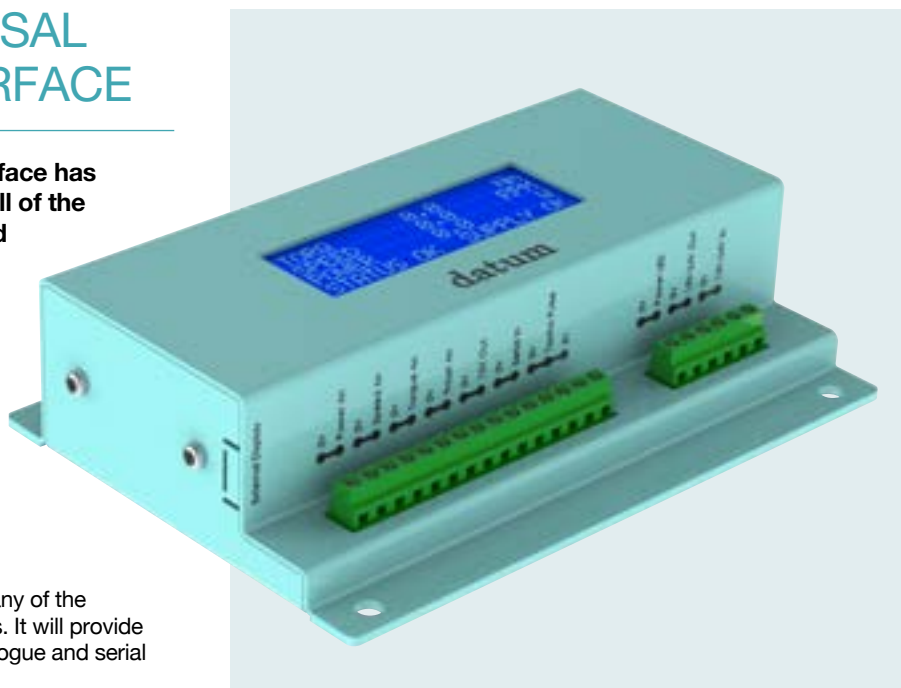

Typical Configuration

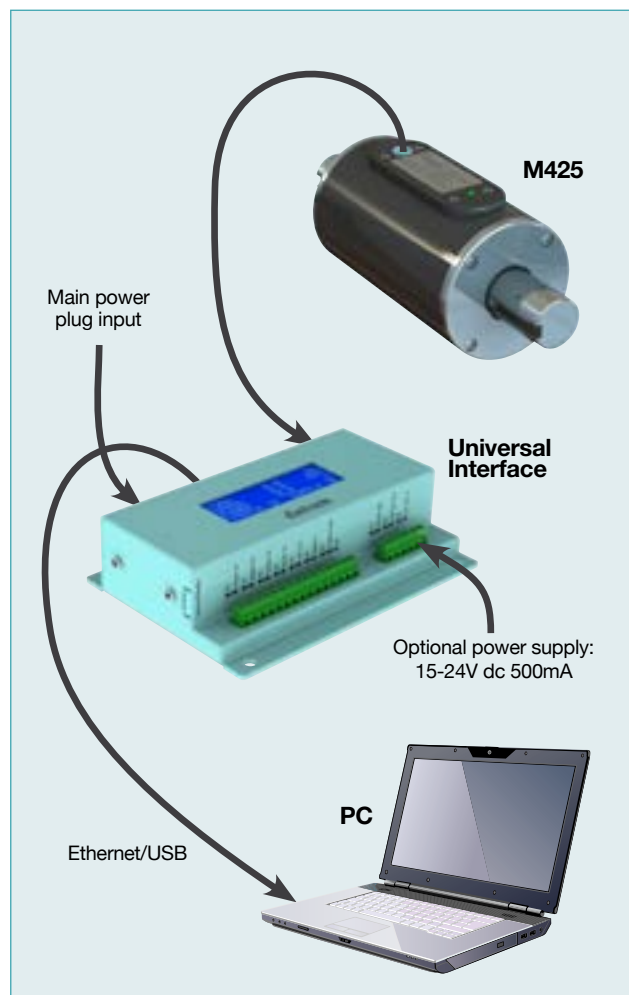

Outputs Provided

Output power - for the M425, RS/FF425, RS/FF410 and the Commercial Marine System

Ethernet - data output and main configuration interface

Mini USB Type B - data output and configuration interface

USB Type A - logging to memory stick

RS485/RS232 Serial - data output

4 channels of analogue - user configurable to 4-20mA 4-12mA, +/-5Vdc, +/-10Vdc, 0-5Vdc and 0-10Vdc

The data used for these outputs can be user selected from the Torque, RPM and Power data plus an additional strain input (often used for shaft bending or thrust).

Additional Input

The Datum Universal Transducer Interface will also accept an input from an external shaft speed tachometer.


Power Supply 15-24Vdc.

Interface Display

The Universal Interface display can show the following data from the Datum Electronics range of Torque Transducers:

| | | |
|--------|-----|-----------|
| TORQ | 0.0 | Nm |
| SPEED | 0.0 | RPM |
| POWER | 0.0 | W |
| STATUS | OK | SUPPLY OK |

Datum Universal Interface Connections Guide

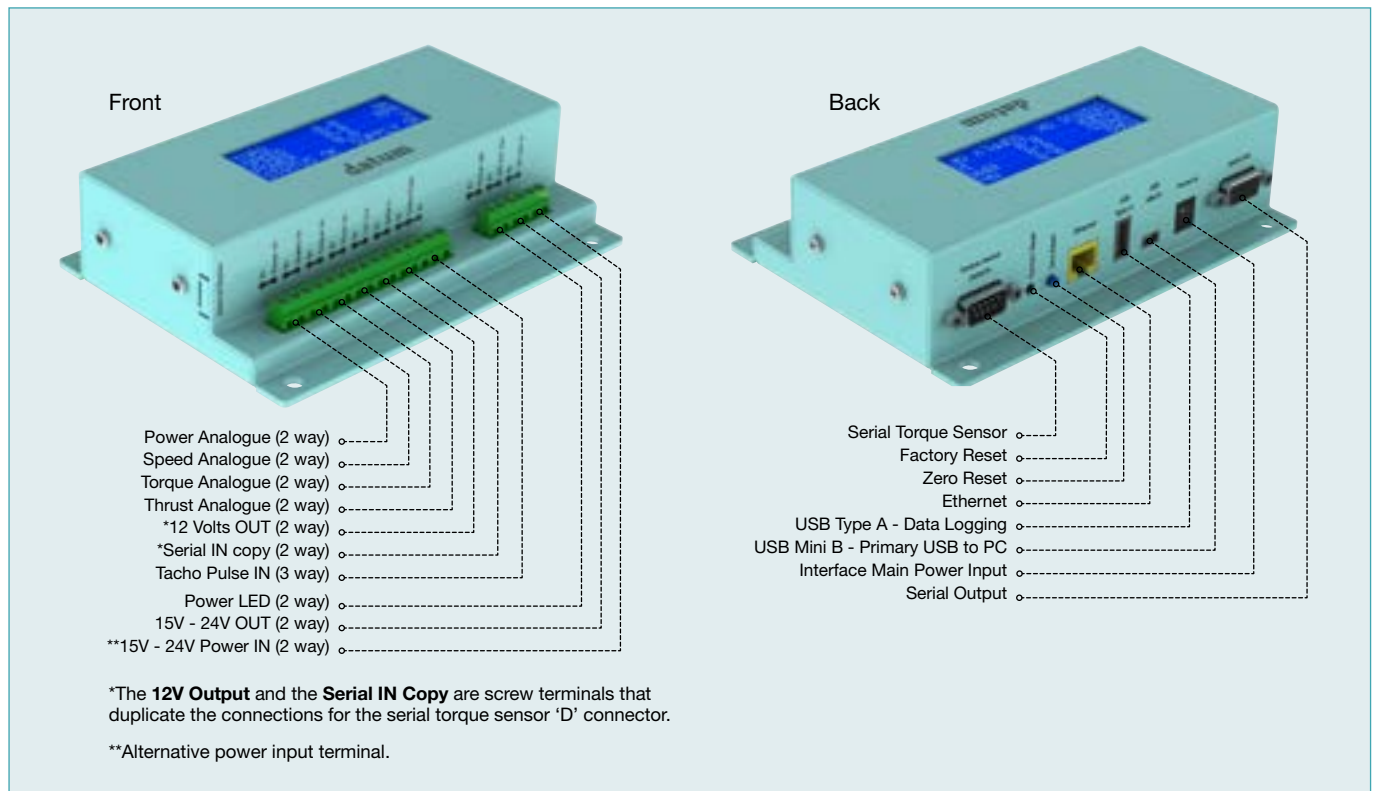

Graphic User Interface

Datum data logging software



The Datum data logging and configuration software provides a wide range of control functions for the range of Datum Electronics torque transducers including set-up and configuration options plus data logging.



Datum Universal Interface Specifications

| SIGNAL INTERFACE OUTPUTS | | | |
|--|-----------|--------------------------|--------|
| Digital: | | | |
| RS485 | | Serial data | |
| RS232 | | Serial data | |
| Ethernet | | Data and configuration | |
| MODBUS UDP | | Serial data | |
| USB Type Mini B | | Serial data | |
| USB Type A | | Data logging | |
| Analogue: | | | |
| All four of the M425 Transducer's analogue output channels can be configured for any of the following settings by the user: 4-20mA configured 4-20mA (4-12-20mA): +/-10Vdc, +/-5Vdc, 0-10Vdc or 0-5Vdc | | | |
| A typical configuration arrangement would be as follows: | | | |
| Channel 1 - Torque | | from 0-500Nm as 4-20mA | |
| Channel 2 - Speed RPM | | from 0-100-rpm as 0-5Vdc | |
| Channel 3 - Power | | from 0-5000W as 4-20mA | |
| Channel 4 - Spare | | | |
| Display: | | | |
| Torque | Speed RPM | Power | Status |

| ENVIRONMENT | |
|-------------------------------|---|
| Normal Specification Range | 10 to 60°C |
| Operating Range | -10 to +70°C |
| Storage Range | -35 to +75°C |
| Environmental Protection | IP54 |
| Electromagnetic Compatibility | EN61326-1:2006 (IEC61000-4), IEC60945) |

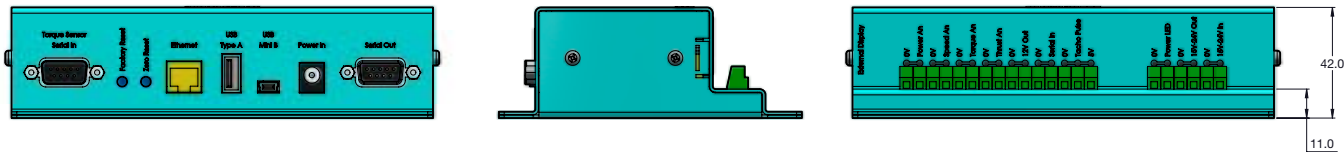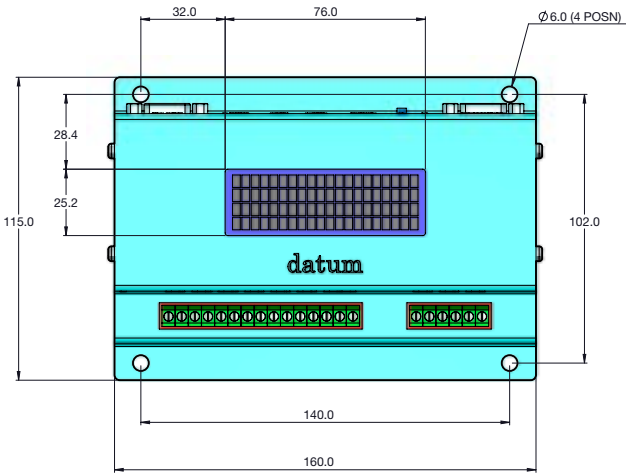

DATUM ELECTRONICS LIMITED
 TELEPHONE: +44 (0) 1983 28 28 34
 FAX: +44 (0) 1983 28 28 35
 EMAIL: support@datum-electronics.co.uk
 WEB: www.datum-electronics.co.uk