WÖHLER



CLEAR VIEW, WHEN SPACE IS TIGHT

Wohler VIS 250 Visual Inspection System

Video inspection, position indicator and locator





















POWER IIP TO 4h

Wohler VIS 250 Visual Inspection System

Intelligent camera head guides and tracks

Wohler's innovative VIS 250 service camera enables you to easily analyze damage in pipes of 1 1/2" dia and larger - and no power outlet required. Compact by design and powered by a rechargeable battery, this complete camera set is supplied in a plastic case. The camera head features a powerful, integrated light to allow you to precisely analyze damage in waste water pipes (at least 1 1/2" dia) and inspect downpipes as well as flue gas lines. Absolutely essential to analyze damage quickly!

In addition to competently analyzing hidden defects in all types of buildings, the Wohler VIS 250 provides you with transparent on-the-spot damage diagnostics.


Thanks to its user-friendly handling and instant startup characteristics, you not only ensure your customers are satisfied but you can also feel relaxed about meeting the challenges ahead. The integrated video memory allows you to fully document your inspection work.

The camera saves a video of the voyage of the camera head through the pipe. It passes even several 90° bends without problem. With a simple touch of a button a photo of a damaged spot can be made

We have brought the localization of the damage to perfection so that it is easy to estimate the cost for the repair. The distance to the camera head is indicated in the display as well as the position. This helps very much in run of ducts. The display always shows where the top and the bottom of the duct are. The user also sees the exact angular momentum in which the camera head is pushed upwards or downwards. With the new Wohler L 200 Locator it is even possible and economic to locate the camera head via radio.

ADVANTAGES

- Ideal for analyzing household waste water pipes of 1 1/2" dia and larger
- Flexible the camera easily takes even several bends in stride
- Position of waterproof camera head indicated in the display
- Integrated locator transmitter precisely locates damage
- Up to 4 hours flexibility storage space for 2 NiMH rechargeable batteries
- 100 ft. FRP push rod
- Compact and safely stored for transport and mobility in a plastic case

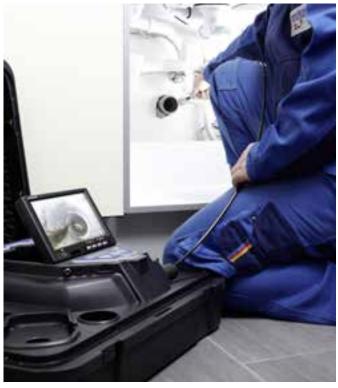

The robust color camera head is waterproof to 100 ft. With a diameter of just 1" it easily negotiates 90° bends in pipes of 1 1/2" dia and larger.



The actual meter count and the position of the head are displayed in the monitor. The Wohler L 200 Locator makes it possible to locate the camera.



The service camera is an essential partner in a wide range of applications including the analysis of flue gas installations.



Wohler's new camera system is both compact and safely stored in a plastic case for transport and mobility.



Space to store 2 rechargeable NiMH batteries (12 V) - each with a rechargeable, operating battery life of up to 2 hours – the main battery is charged in the case

TECHNICAL DATA

Monitor

momon	
Dimensions housing	7" x 4.5" x 1.3"
TFT-display	7" / 16:9 format
Video out	FBAS signal
Weight	1 lbs
Power supply	Space for 2 rechargeable batteries, each 12 V or via power
	pack
Battery operating time	Max. 2 rechargeable batteries, each 120 mins. = 4 h
	(battery status in display)

Miniature color camera head, 1" diameter1/3" COLOR CMOS Resolution420 lines

	12000
Pixels	768 x 576 (PAL), 656 x 492 (NTSC)
Light sensitivity	0.5 Lux
Lens	f = 0.09", F = 2.5
Viewing angle	115°
Light source	12 white LEDs
Degree of protection	Waterproof to IP 68
Dimensions	Ø 1" x 1.5"
Weight	0.5 lbs
Operation temperature	32104 °F, RH 95 % MAX
Storage temperature	4122 °F, RH 95 % MAX
Transmitter frequency	Adjustable 8.9 kHz or 9.2 kHz

Push rod	
Length	100 ft.
Diameter	0.24"
Distance measurement	electronic meter counter
Plactic case	

Dimensions	20" x 17" x 7" (l x w x h	j
Weight	15 lbs	

Locator receiver

Display	. Graphic	visualization	of	transmitted	position
---------	-----------	---------------	----	-------------	----------

Output	imped	lance
--------	-------	-------

Output impedance	
Headphones32 Ohm	
Power supply12 V NiMH battery (rechargea	ble)
Operating temperature32104 °F	
Storage temperature14104 °F	
Weight1.3 lbs	
Dimensions13" x 6" x 3" (l x w x h)	

Memory

Recording	4	GB SD	card	(2.5)	5 h	recording	capacity	()
Late de la		the LIOP						

X Applications

Analyze damage and inspect:

- · Waste water pipes of 1 1/2" dia and larger
- · Ventilation lines of 1 1/2" dia and larger
- · Inspect hollow spaces, e.g. in front-wall installations
- · Flue gas lines up to approx. 6" dia

☆ Functionality

- · Waterproof, light-sensitive camera head with a diameter of just 1" easily takes bends in stride
- · Store video footage on a 4 GB SD card (Wohler VIS 250)
- · Digital Indication of the camera head
- · Electronic metering displayed on monitor
- · Fully equipped mobile solution in a robust, plastic case
- · Does not require main power supply
- · Bright TFT color monitor for razor-sharp images
- · Tiltable and removable monitor
- · Integrated video output for documentation purposes
- · Battery operating time: 2 x 120 min. with 2 rechargeable batteries (optional)
- · Data exchange via mini USB cable (Wohler VIS 250)

- · Transmitter integrated in camera head makes it possible to precisely locate the camera head
- · Facilitates targeted repairs to damaged pipelines
- · Telescopic holder makes it possible to locate damage under floors or in ceilings
- · Chalk holder with lithographic chalk ensures it is possible to mark located damage immediately
- · Powerful rechargeable battery

Data management

Simply record and store photos and videos on a 4 GB SD card for documentation and archiving purposes for you and your customers

Documentation / Position Indicator



The "Save function" makes it possible to save and view what you see at the push of a button. The integrated position indicator ensures you keep your sense of orientation in the pipe.

Bright illumination



Thanks to the excellent lighting system of the color camera head, the camera supplies razor sharp images of even the darkest corners of the section under inspection.

Flexible



The tiltable and removable TFT wide-screen color monitor provides brilliant images, which it is possible to document via video memory on the SD card, a laptop or video recorder.

Integrated locator transmitter



The camera head of the Wohler VIS 250 / 200 is equipped with a transmitter as standard – that means the camera head can easily be located by the new Wohler L 200 Locator.

Wohler L 200 Locator

Penetrating views through concrete and asphalt

Inspecting pipes under the ground, in ceilings and walls is daily routine for specialist tradesmen and women. And after the inspection, the next task is to locate the position of the damage accurately to be able to offer and carry out the necessary repair or cleaning work with precision. With the Wohler L 200 Locator that is now all just child's play. It precisely detects radio signals transmitted by the flexibly positionable camera head.

Skilled tradesmen and women and their customers are able to save considerable time and cost savings by utilizing video inspections to visualize leaks and document damaged or soiled sections of pipework. The Wohler L 200 Locator also locates the radio signals transmitted by the camera head of the Wohler VIS 250 / 200 systems. Damage is displayed precisely in a clear-cut graphic on the display of the Locator to ensure it is discovered rapidly and marked.

Insights keeping you in the picture

This is how the Wohler L 200 makes locating simple: The Locator attaches to a telescopic pole. Guided close to the ground,

along walls or below the ceiling, it locates the very long radio waves transmitted by the camera head. Particularly ideal: The user is guided by the bright color display throughout the locating process - crosshairs are displayed on a horizontal grid system. In addition, an acoustic signal is emitted and made audible via a loudspeaker or headphones. The cross-hairs and the strength of the signal indicate the direction and distance to the located point. Once the section of pipe to be repaired or cleaned has been found, it can be marked easily. For this purpose, a holder is provided to affix a piece of chalk to the end of the Locator.



ADVANTAGES

- Locates radio signals transmitted by the camera head rapidly pinpoints damage
- Easy to handle user guided via display throughout the locating process
- · Bright, easy-to-read color display
- Telescopic pole easily track down damage anywhere
- Chalk holder for chalk to mark the position where damage is found

Kit and Accessories

Sets Wohler VIS 200	Qty
Wohler VIS 200 Video Inspection Camera	
Video inspection for sewer and water pipes, drain and flue lines, ductwork, etc.	
Comes with: Wohler TFT monitor 7" with 6 ft. connection cable (removable monitor), digital meter counter, Wohler camera head 1" dia V2, 100 ft. push rod 0.24" dia, anti-slide mat, 1 NiMH battery and charger, complete system in a plastic case, guidance sleeve, guidance ball	
P/N 6261	
Wohler VIS 200 Video Inspection Camera with Wohler L 200 Locator Video inspection for sewer and water pipes, drain and flue lines, ductwork, etc. Comes with: Wohler VIS 200 NTSC Service Camera with digital meter counter in heavy duty carrying case, miniature color camera	
head Ø 1" V2 NTSC, 7" TFT color monitor, 6 ft. connection cable (removable monitor), 100 ft. push rod Ø 0.24", anti-slide mat, 1 NiMH battery with charger, Wohler L 200 Locator (Receiver), 1 guidance sleeve for mini camera head, 1 guidance ball for flex part of camera push rod	
P/N 8937	
Sets Wohler VIS 250	Qty
Wohler VIS 250 Video Inspection Camera Video inspection for sewer and water pipes, drain and flue lines, ductwork, etc.	

P/N 8937	
Sets Wohler VIS 250	Qty
Wohler VIS 250 Video Inspection Camera	
Video inspection for sewer and water pipes, drain and flue lines, ductwork, etc.	
Comes with: Wohler VIS 250 NTSC Service Camera with digital meter counter in heavy duty carrying case, miniature color camera head 1" dia V2 NTSC, 4 GB SD card and mini USB cable 7" TFT color monitor, 6 ft. connection cable (removable monitor) 100 ft. push rod 0.24" dia, anti-slide mat, 1 NiMH battery with charger, guidance sleeve, guidance ball	
P/N 6253	i
Wohler VIS 250 Video Inspection Camera with Wohler L 200 Locator	
Video inspection for sewer and water pipes, drain and flue lines, ductwork, etc.	
Comes with: Wohler VIS 250 NTSC Service Camera with digital meter counter in heavy duty carrying case, miniature color camera head 1" dia V2 NTSC, 4 GB SD card and mini USB cable, 7" TFT color monitor, 6 ft. connection cable (removable monitor) 100 ft. push rod 0.24" dia, anti-slide mat, 1 NiMH battery with charger, Wohler L	

200 Locator (Receiver), guidance sleeve, guidance ball

Accessories		Qty
Wohler L 200 Locator (Receiver)		
	P/N 7430	
Wohler VIS Cleaning Set		
with plastic case, for approx. 50 applications		
1 liter desinfection spray, 50 cleaning tissues, 100 disposa	able gloves	
size XL (powder free), 6.76 ounce lubricant, plastic case		
	P/N 4725	
Wohler VIS Cleaning Set Refill		
for approx. 50 applications		
1 liter desinfection spray, 50 cleaning tissues, 100 disposi		
size XL (powder free), 6.76 ounce lubricant, in plastic bag		
	P/N 4726	
Guidance Sleeve with protection cage		
for miniature camera head 1" dia	the come:-	
improves ability to navigate through pipe bends, protects head and the objective	ine camera	
	P/N 3847	
Wohler Camera Roller Guide	. ,	
suitable for camera heads and rods		
Cartagio for Carriora ricado ana 1005	P/N 3681	
Cuidence Pell	T/ IN 300 I	
Guidance Ball	to through	
for flex part of camera push rod improves ability to naviga pipe bends	ite trirougri	
I. I	P/N 3634	
Sunshade for Wohler VIS 2xx / 3xx	.,	
for 7" TFT monitor		
	P/N 6814	
Guidance Sleeve	1714 0014	
for mini camera head		
To Thiri Garicia ficad	P/N 3827	
Walan VIC Cantains Otas	F/ N 3021	
Wohler VIS Centering Star for Wohler VIS 2000 PRO / VIS 400 / VIS 2xx		
8" dia with 6 brushes, with thread, centers the GRP came	era rod	
to guide the camera head	, a 10u,	
-	P/N 3854	
Wohler VIS Centering Brush		
for Wohler VIS 2000 PRO / VIS 400 / VIS 2xx / VIS 3xx		
	P/N 3850	
Wohler Battery 12 V NiMh 2600 mAh		
for Wohler VIS 2xx / VIS 3xx		
operation time: 120 min, warranty: 12 months		
•	P/N 4715	
Power Supply		
for Wohler VIS 3xx / VIS 2xx		
18V, 1,5A, 100-240V, 50 Hz, 2.1 mm female plug, center	plus,	
charge time 3 hours for all countries		
	P/N 3789	
Car charger Wohler VIS 2xx / 3xx		
18 V		
	P/N 3169	



WWW.HOSKIN.CA

P/N 8932

- INTEGRATED SYSTEMS RENTALS SERVICE
- ENVIRONMENTAL INSTRUMENTATION MATERIALS TESTING